

2014—XL 110HDG

Unit# 532452



- 110,000 capacity in 10'
- Approximately 35" Gooseneck travel up/down
- 7 position ride height
- 108" Swing clearance
- 16" king pin setting
- Wet Kit required to run hydraulics
- 24' main deck
- 24" load height
- 8" Ground Clearance
- 25,000 lb air ride suspension
- 3—25,000 lb nominal axles
- Manual ride height control
- 54" spacing
- 40" rear deck height
- 14' long rear bridge
- Flag holders
- Aluminum Rims 255/70R/22.5 tires

Available for short and long-term lease needs.

Contact Your Sales Representative for Additional information.

601-939-2200

XL LOW-PROFILE HDG



XL 110 Low-Profile Hydraulic Detachable Gooseneck

YOUR SOLUTIONS-BASED HAULING PARTNER



low-profile neck

LOW-PROFILE ADVANTAGE

The low-profile neck, a 26' long well and a rear transition with 32° slope makes loading vehicles onto the rear deck of this unit extremely efficient. The XL Low-Profile HDG is specifically designed for hauling scrapers and equipment of all sizes.



heavy-duty outriggers

VERSATILE DECK FEATURES

The XL 110 Low-Profile HDG deck is fully equipped for versatile hauling, with 13 chain drops per side, 7 bent D-rings per side, and removable heavy-duty swingout outriggers with heavy-duty flatback outriggers front and center.



DELUXE OPTION


The Low-Profile HDG Deluxe package offers removable semi load-bearing wheel covers, 31" front flip ramps, 4" amber strobe light with battery backup box, 4 way plug at rear for strobe on FA to run off of battery backup, and a 13 HP unit with dual hydraulics.

BUILT WITH YOU IN MIND

- Lock pin automatically engages at every transport position for safe travel.
- 5 position ratchet-style ride height control adjusts height simply by moving a lever.
- Upper flange reinforcement strengthens the front ramp.
- Available with 54½" or 60" axle spacing
- 3rd axle lift raises axle for return trip, reducing tire wear.
- 2 chain slots on each bolster
- Frame reinforcement for Flip Axle
- Optional bolt on wheel covers can be removed for weight reduction.
- XL paint includes a **full 1 year warranty**.
- XL Specialized Trailers' HDG trailers feature a **5 year structural warranty**.

FIND YOUR SPECIALIZED SOLUTION TODAY
visit xlspecializedtrailer.com

XL 110 LOW-PROFILE HDG: STANDARD SPEC

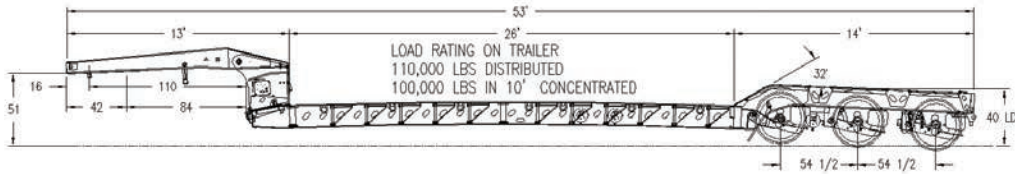

XL 110 LOW-PROFILE HDG
CAPACITY: 110,000 LB OVERALL
CONCENTRATED: 110,000 LB IN 16'
CONCENTRATED: 100,000 LB IN 10'
OAL: 53' | OAW: 102"

GOOSENECK

13' LOW-PROFILE SCRAPER STYLE NECK
51" 5TH WHEEL HEIGHT
5 VARIABLE RIDE HEIGHT POSITIONS
110" & 84" SWING CLEARANCE
16" & 42" KING PIN SETTING
HYDRAULICS RUN OFF OF WET KIT
AIR OPERATED LOCK W/ MANUAL
SAFETY LATCH
BRACKETS FOR POWER UNIT

GOOSENECK OPTIONS

TOOLBOX IN REAR OF NECK W. STEEL DOOR
13HP HONDA UNIT, BASE OF NECK/TOP OF
NECK, STEEL COVER, DUAL HYDRAULICS
STEEL FENDERS ON SIDE OF GOOSENECK
ALUMINUM FENDERS ON SIDE OF
GOOSENECK
REGISTRATION HOLDER

MAIN DECK

54 1/2" AXLE SPACING: 26' LONG
60" AXLE SPACING: 25' LONG
T-1 FLANGE, 80K WEB
(4) 16" FULLY CAMBERED I-BEAMS
24" LOADED DECK HEIGHT
8" GROUND CLEARANCE
10" & 4" STUBBED JR. I-BEAMS ON
12" ALTERNATING CENTERS
(7) BENT D-RINGS PER SIDE
1 3/8" APITONG DECKING RAISED -
OPEN CENTER
(13) CHAIN DROPS PER SIDE
REMOVABLE HEAVY-DUTY SWING
OUT OUTRIGGERS ON 24" CENTERS
HEAVY-DUTY FLAT BACK OUTRIGGERS
FRONT AND CENTER
(2) FLAG HOLDERS
BUCKET WELL AT REAR, PLATE ON BOTTOM
FRONT RAMP UPPER FLANGE
REINFORCEMENT

MAIN DECK OPTIONS

31" FRONT FLIP RAMPS
CENTER DECK COVERED
STORAGE COMPARTMENTS IN FRONT OF
MAIN DECK
OAK OUTRIGGER PLANKS, 2" X 10"

REAR BRIDGE

54 1/2" AXLE SPACING: 14' LONG
60" AXLE SPACING: 15' LONG
REAR TRANSITION WITH 32° SLOPE
40" LOADED DECK HEIGHT
OPEN WHEELS-BOLSTER STYLE
OPEN BOOM TROUGH
(2) FLAT D-RINGS ON MAIN BEAMS AT REAR
(2) CHAIN DROPS ON EACH BOLSTER
(2) FLAG HOLDERS
(2) STAKE POCKETS IN TAIL CHANNEL
FOR WIDE LOAD SIGN
FRAME REINFORCEMENT FOR BOOSTER

REAR BRIDGE OPTIONS

REMOVABLE WHEEL COVERS LOAD-BEARING
REMOVABLE WHEEL COVERS,
SEMI-LOAD BEARING
COVERED BOOM TROUGH -
BOLT ON BOTTOM PLATE
4" AMBER STROBE TAIL LIGHT
BATTERY BACK-UP W. 4-WAY PLUG FOR FA
WIDE LOAD SIGN - FIT IN STD BRACKETS
(1) 4-WAY PLUG AT REAR

SUSPENSION

25,000 LB AIR RIDE
RAISE AND LOWER VALVE
MANUAL RIDE HEIGHT CONTROL

SUSPENSION OPTIONS

LIQUID FILLED AIR GAUGE
AIR WEIGH DIGITAL SCALE

AXLES

(3) 25,000 LB NOMINAL
54 1/2" SPACING
AIR LIFT ON 3RD AXLE
HUB PILOT, OUTBOARD DRUMS
16 1/2" X 7" BRAKES
AUTO SLACK ADJUSTERS
LIMIT CHAINS ON ALL AXLES
SPRING BRAKES ON 1 AXLE
ABS NOT REQUIRED

AXLE OPTIONS

HUBOMETER
DUST SHIELDS
CAT EYE SYSTEMS

WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS
255 / 70R / 22.5 H RATED TIRES

WHEEL AND TIRE OPTIONS

ALUMINUM MILL WHEELS (INSIDE)
ALUMINUM MILL WHEELS (OUTSIDE)
ALUMINUM POLISHED WHEELS (OUTSIDE)
CUSTOMER SPECIFIED TIRES
CUSTOMER SPECIFIED MUD FLAPS

LIGHTING

D.O.T. APPROVED 12V SEALED
GROTE HARNESS
RUBBER MOUNTED LED LIGHTS
(1) MID-TURN SIGNAL PER SIDE
(2) CLEARANCE LIGHT PER SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LIGHT PACKAGE WITH
ALUMINUM COVER

PAINT

FULL 1 YEAR WARRANTY
BLACK, IH RED, OR NEW CAT YELLOW
AIR & ELECTRIC DONE AFTER PAINT

PAINT OPTIONS

NON-STANDARD PAINT COLORS
NON-STANDARD METALLIC PAINT

AVAILABLE MODELS

XL 110 LOW-PROFILE HDG
XL 110 LOW-PROFILE HDG: DELUXE PACKAGE

OTHER CUSTOM CAPACITIES AND
OPTIONS ALSO AVAILABLE,
ASK YOUR SALES REP FOR DETAILS